


Bookeye® 5

V3 Basic | Kiosk | Professional
Highest scan quality at lowest cost
Three models suit all applications

Bookeye 5 V3

Next Generation!

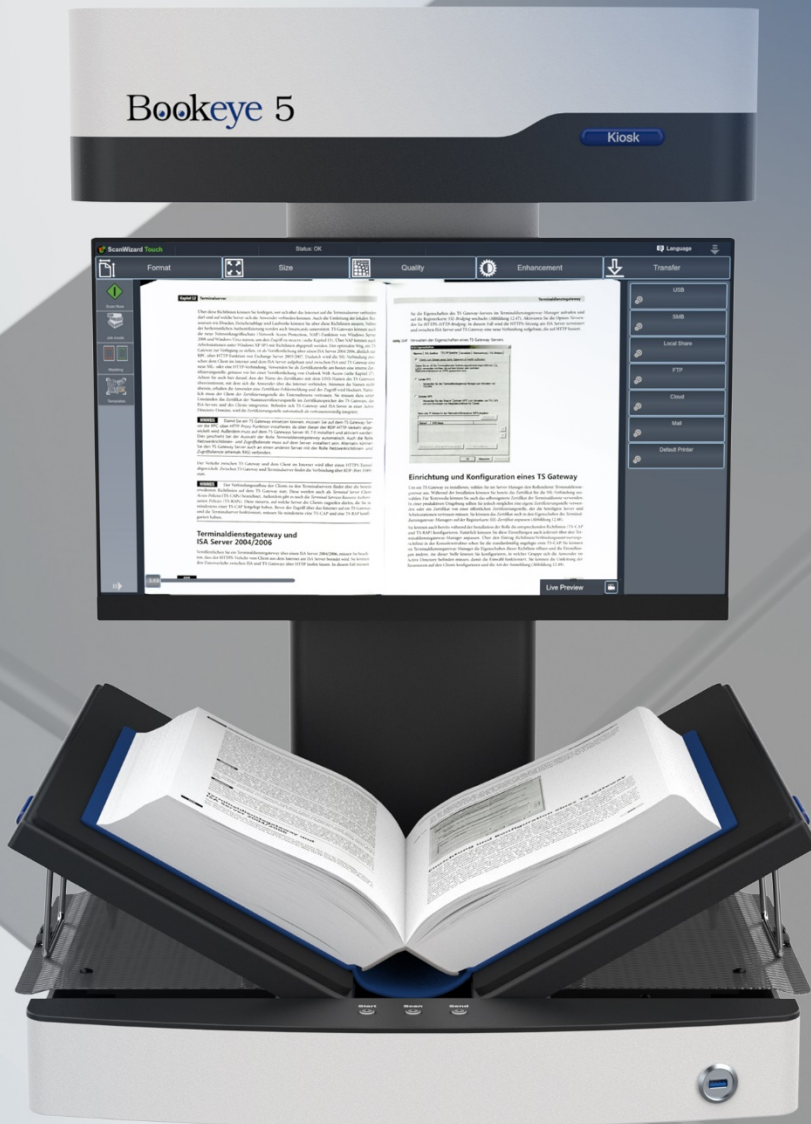


Next generation book scanner
Powerful, yet small and affordable



© 02_2020 / EN



- COLOR OVERHEAD BOOK SCANNER
- SCAN AREA 50% MORE THAN DIN/ISO A3
- TRUE SCAN TECHNOLOGY, NOT A DIGICAM SUBSTITUTE
- FADGI AND ISO 19264-1 COMPLIANT
- 400 DPI RESOLUTION
600 DPI OPTIONAL
- 0.8 SEC FOR A3+ SCAN
- V-SHAPED MAGNETICALLY COUPLED BOOK CRADLE OPENS 120° OR 180°
- LASER ASSISTED BOOK FOLD CORRECTION
- AUTOMATIC FINGER REMOVAL
- AUTOMATIC CROP AND DESKEW
- VIRUS PROTECTED 64BIT LINUX OPERATING SYSTEM
- INTEL QUAD CORE I3 GEN.8
240GB SSD, 8GB RAM
- GIGABIT TCP/IP NETWORK INTERFACE
- LARGE 21" FULL HD MULTITOUCH FOR SIMPLIFIED OPERATION
- VIRTUAL RESCAN, MODIFY WITHOUT RESCANNING
- LIVE PREVIEW THROUGH SECOND MATRIX CAMERA
- EASY 3 BUTTON ACCESS START, SCAN, SEND
- USB 3.0 PORT ACCESSIBLE ON FRONT PANEL
- EASY INSTALLATION VIA SCAN2NET® TECHNOLOGY
- OPTIONAL SCAN2PAD® HOTSPOT

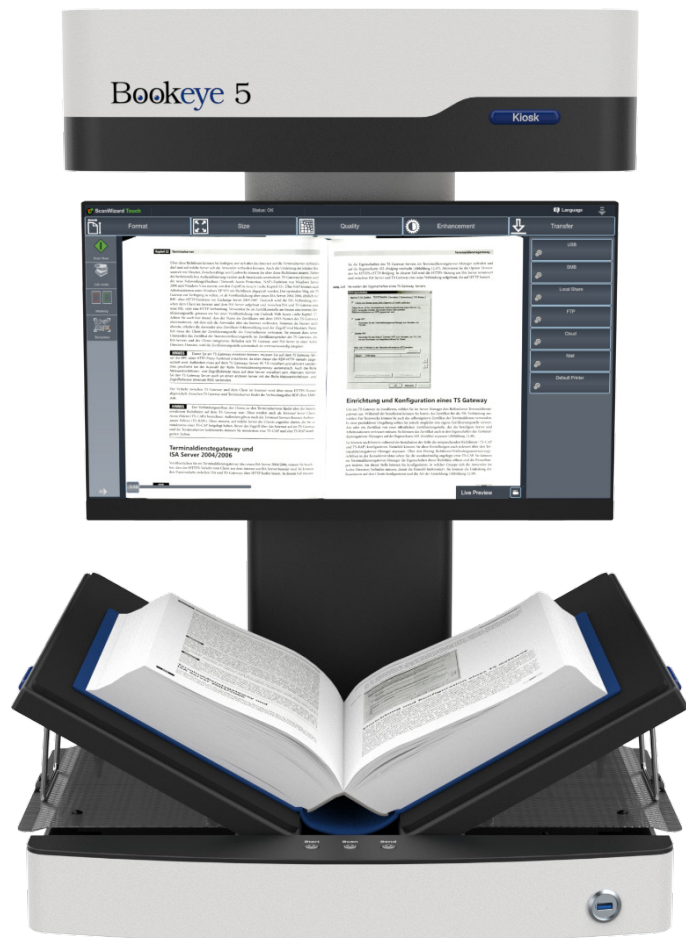

The Bookeye® 5 V3 book scanner is available in three models, all simple to use and small enough to sit on any desk or workspace. Installation is so simple; you will be scanning minutes after taking it out of the box. Easy, fast and affordable. The Bookeye® 5 V3 book scanner is perfect for libraries, archives, offices and anywhere you want to scan or copy.

All models include a 21" full HD multitouch screen, three direct control buttons for fast and effective scanning and the acclaimed Scan2Net® technology platform.

Bookeye® 5 V3 Overhead Book Scanner

Fully reengineered, the Bookeye® 5 V3 is the first member of a new generation of eco-friendly, ergonomic and easy to operate book scanners. It is equipped with a high resolution, low noise CCD scanner camera and an additional matrix camera for live previews.

Bookeye® 5 V3 is available in three models:


Basic The entry level model offers the same scanning functionality and speed as the other levels at the lowest possible cost. Upgrades to the other models are options.

Kiosk This model includes all of the features of the Basic model plus the Scan2Pad application for scanning and operation with any mobile device through the WiFi hotspot.

Professional This model includes all of the features of the Basic model, but has a higher resolution of 600 dpi and client interface for 3rd party software to meet the highest quality standards.

The unique book cradles allows users to digitize books and documents by either laying them flat on the scanning bed at 180° or in the V-cradle, at an angle of 120° for gentle, protective handling of the source material. The two sides of the cradle are magnetically coupled so that the book fold can be moved easily in the center for optimal scan results.

Bookeye is the eco-friendliest scanner on the market, consuming only 1.5W in standby. Its high quality LED lamps only light up when needed, saving even more energy.

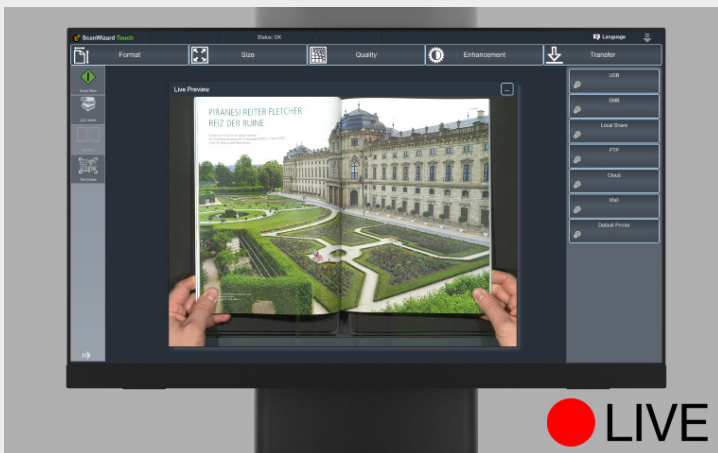

Live preview camera to optimize document position before scanning

Highlights that make the Bookeye® 5 V3 book scanner the right choice for every application

- Large 21" multitouch screen for operation and preview can be mounted to scanner in three different locations.
- Optional 2nd screen supported for preview.
- Dark mode operation – enhances scan quality through less light reflection and improves operation by reducing eye strain.
- Live Preview – See the document position in live video for correct positioning before scanning.
- Most versatile book cradles, 120°, 180°, shift apart for book bound, shift left and right for optimum position of book.
- Output formats: PDF, PDF/A, JPEG, TIFF, PNM, multipage PDF and TIFF, DICOM and many more.
- Digital color balance, wide color gamut, supports sRGB, Adobe RGB, native RGB.
- FADGI and ISO 19264-1 compliant.
- Multilingual operation – more than 20 languages available.
- ScanWizard runs on internal touch or on external device through any browser via network.
- Remote maintenance, troubleshooting and firmware updates.

Accessories and Options:

- BE5-SCAN2PAD** Scan2Pad® wireless hotspot.
- BE5-V3-PRO-OPT** Upgrade to Professional.
- SCAN2OCR** Background OCR on scanner.
- BE5-V3-BK-SP12M** Full Coverage Warranty, up to 5 years of free spare parts and consumables.



Store images directly to any USB devices via the USB 3.0 port

Bookeye® 5 Models and Bundles

| | |
|--------------|--|
| BE5-V3 | Basic – entry level model 400dpi, V-book cradle, 21" touchscreen |
| BE5-V3-KIOSK | Kiosk – perfect for self-service applications Basic + Scan2Pad, Full Coverage Warranty |
| BE5-V3-PRO | Professional – 600dpi for demanding applications Basic + 600dpi, Full Coverage Warranty |

Bookeye® 5 Applications

- Preserving books and sensitive historical documents
- Scan newspapers, periodicals, catalogs and magazines
- Scan and store images to mobile devices with Scan2Pad®

Bookeye® 5 Markets

- Libraries, Universities, Repro shops
- Archives, Government, Registries, Military
- Any office environment

The Scan2Net® platform is the technological foundation of all WideTEK® and Bookeye® scanners from Image Access. It replaces the proprietary scanner drivers and software that traditional scanners require with the fastest common, nonproprietary inter-device connection available: TCP/IP over Ethernet. With network interface speeds much higher than USB 3.0 or camera link, Scan2Net® devices are able to reach unrivaled performance at extremely low connectivity cost.

Scan2Net® scanners feature a 64 bit Linux based real time operating system, dedicated to scanner specific imaging and mechanical control tasks, maximizing scanning speeds and performance.

Scan2Net® Advantages

- 64 bit Linux based computer, fast and virus protected
- Routable, easy integration into existing network structures
- Only a single IP address is required to run the scanner
- Integration and remote access via the Intranet or even the Internet
- Scans directly to SMB, FTP, hot folders, USB, Email or the Cloud
- All hardware and software built in, no need for external PCs
- Simple, intuitive operation via full HD touchscreen
- Clear menu structure, help files build in
- Multilanguage support, customizable user interface

TECHNICAL DATA

| | |
|--------------------------|--|
| Maximum Scan Area | 390 x 480 mm (15.3 x 18.9 inch), 50% more than DIN/ISO A3 |
| Scanner Resolution | 400 x 400 dpi (optionally 600 x 600 dpi) |
| Scan Speed | DIN A3+ @ 150 dpi: 0.8 s, DIN A3+ @ 200 dpi: 0.9 s, DIN A3+ @ 300 dpi: 1.3 s, DIN A3+ @ 400 dpi: 1.7 s |
| Color Depth | 48 bit color, 16 bit grayscale |
| Scan Output | 24 bit color, 8 bit grayscale, bitonal, enhanced halftone |
| File Formats | Multipage PDF (PDF/A) and TIFF, JPEG, JPEG 2000, PNM, PNG, BMP, TIFF (Raw, G3, G4, LZW, JPEG), AutoCAD DWF, JBIG, DjVu, DICOM, PCX, Postscript, EPS, raw data and more |
| ICC Profiles | Embedded for sRGB, Adobe RGB and native. Individual profiling via web based Scan2ICC subscription |
| Quality | Complies to FADGI *** guidelines and ISO 19264-1 |
| Camera | CCD line sensor, 22,500 pixels (11,000 scan lines equals to a 245 MPixel matrix camera) |
| Live Preview Camera | CMOS matrix, area sensor |
| Light Source | White LEDs, tested according to IEC 62471, no IR/UV emission |
| Lamp Lifetime | 50,000 h typ. Lamps are covered by the Extended Warranty Option |
| Computer | 64 bit Linux, Intel Core i3 generation 8 processor, 240GB SSD, 8 GB memory for extra large jobs |
| Touchscreen | 21" full HD 1920 * 1080 multitouch screen |
| USB Port | 1 x USB 3.0 port, 4 x USB 2.0 port |
| Interface | 1 GBit fast Ethernet with TCP/IP based Scan2Net® interface |
| Dimension / Weight | H x W x D: 720 x 510 x 540 mm (28 x 20 x 21 inch) / 29 kg (64 lbs.) |
| Electrical Specification | 100-240 V AC, 47 - 63 Hz (external power supply, complies with ECO standard CEC level VI) |
| Power Consumption | < 0.5 W (Sleep) / 1.5 W (Standby) / 40 W (Ready to Scan) / 110 W (Scanning) |
| Environment | Operating temperature 5 to 40 °C (40 to 105 °F), relative humidity 20 to 80 % (non-condensing) |
| Noise | < 42 dB(A) (Scanning) / < 33 dB(A) (Standby) |
| Approvals | IEC/EN/AUS/NZL 62368-1, CB; UL/CSA 62368-1, FCC part 15, ETLus, EN 55032, EN 55024, EN 61000-3-2, EN 61000-3-3, CCC, BIS, RoHS, WEEE |



PRIORITY

ENGINEERING

4024 W. 10th. Street
 Indianapolis, IN 46222
 317-308-7409
 customercare@priorityengineering.net

www.priorityengineering.net